

**Automatic electronic hand dryer**


- Hand dryer with electronic sensor.
- Model for mounting on the surface.
- Stainless steel sheet housing satin finish. Also available in polish finish (NOFER 01451.B) and white finish (NOFER 01451.W).
- Suitable for collectivities and designed for high traffic bathroom and continuous use.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with LVD and EMC standards and the current European directives.

**TECHNICAL DATA**

- Satin finish AISI 304 stainless steel cover manufactured in one piece (thickness=1,2 mm).
- Protection grid made in polycarbonate. Fire-resistant plastic evolute.
- Wall fixation by 4 drills (Ø 8 mm). Fixing material included.
- Electronic Infrared sensor that stops the function when the hands leave the active range.
- Air temperature (room temperature de 20°C): 60°C.
- Universal motor without brushes (maintenance not needed).
- Motor speed 2800 r.p.m.
- Air speed: 65 km/h.
- Air flow: 2300 l/min.
- Total power 2050 W.
- Resistance: 1840 W.
- Motor power: 110 W.
- Voltage/Frequency: 220-240 V - 50/60 Hz.
- Electrical isolation: Class II.
- Distance to the sensor: 10-50 cm (with possibility of regulation).
- Overheating resistance thermostat (automatic rearmament).
- Thermal fuse double security adjusted to 133°C.
- Maximum consumption 9 A.
- Noise level from 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 323 height x 253 width x 152 depth (mm).
- Net weigh: 3,9 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer will start automatically and it continues working while the hands are within the active range. The device switches off after a few seconds of removal.
- Cleaning: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then dry it.
- Estimated drying time: 40 seconds.

**SUGGESTED TEXT FOR PRESCRIPTION**

NOFER hand dryer, with AISI 304 stainless steel housing satin finish, hot air driven with electronic sensor, 2050 W power and temperature of 60°C. Speed motor 2800 r.p.m. Dimensions: 323 height x 253 width x 152 depth (mm).



NOFER S.L.  
Ctra. Laureà Miró, 385-387  
08980 · Sant Feliu de Llobregat (Barcelona)  
Tel +34 934 742 423 · Fax +34 934 743 548  
nofer@nofer.com · www.nofer.com

Related  
Products



01451.B




01461.W



01451.W


### TECHNICAL DRAWING

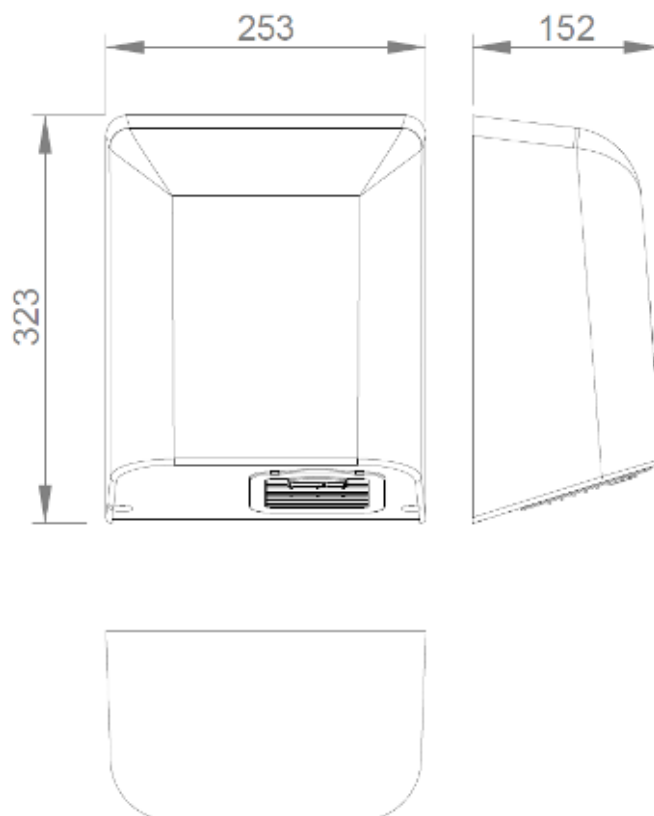

DIMENSIONS IN mm

### INSTALLATION

In toilet areas with a high frequency use, the recommendation is to install one hand dryer for each toilet. In toilet areas with a lower frequency of use, the recommendation is to install one hand dryer for every two sinks or two dryers for every three washbasins. Installation should be as shown in fig-0. In case of installation on marble or shiny surfaces, it should be located 40 cm above the surface.

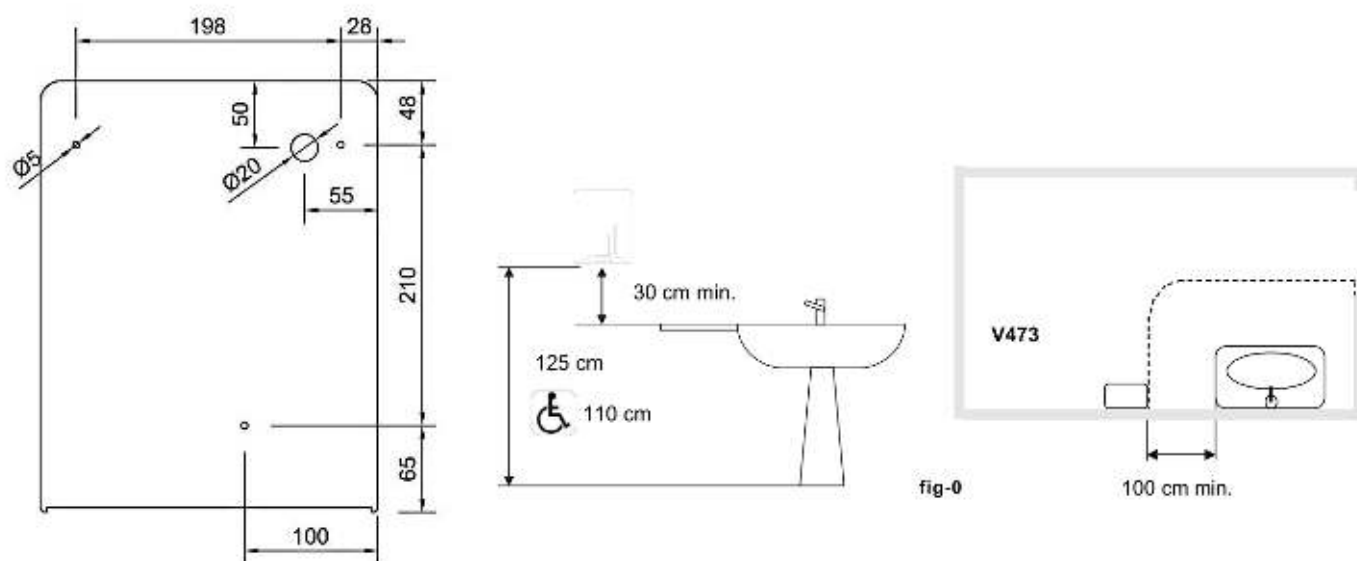

NOFER S.L.  
Ctra. Laureà Miró, 385-387  
08980 · Sant Feliu de Llobregat (Barcelona)  
Tel +34 934 742 423 · Fax +34 934 743 548  
nofer@nofer.com · www.nofer.com